



"USP BULGARIA" LTD.
Bulgaria, Sofia
1582, jk "Druzhba" 2
Blvd "Prof.Tsvetan Lazarov" № 90
+380503115715


Filler for plastic Flex

Filler for work on plastic on the elements of laminates, solid PCV and ABS. Very elastic. Polyester putty, two-component. Good thixotropy allows filler minor irregularities and risks on the surface of the plastic parts. specially selected components give putty high thermal expansion approximate to the plastic, resulting in good adhesion and protection against changes in environmental temperature.



For professional use only

How to use: Apply the filler in the package thoroughly before use. Put the required amount on a clean and dry surface and mixed with the hardener in the ratio of 100 g BPO putty to 2-3g. hardener. Care should be accurate mixing ratios, as it changes in color change occurs, or nail surface, gluing or abrasive. Apply a thin layer of 0.5-1mm

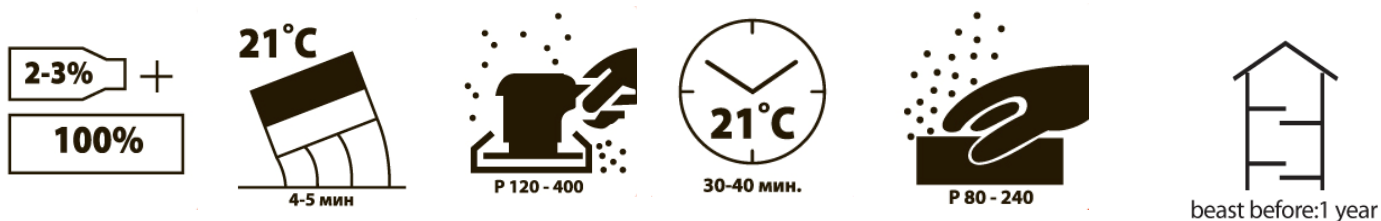

Precautions: Contains Styrene. Flammable. Do not breathe vapor / spray. Harmful may cause lung damage if swallowed. Repeated exposure may cause skin dryness or cracking. Avoid contact with skin. Wear suitable protective clothing, gloves and goggles or a face shield. Use only in well-ventilated areas. Avoid release to the environment, follow the instructions and safety data sheets. If swallowed, seek medical advice immediately and show this container or label.